


NOTOS® Multi Screw Pumps 3NS Mini

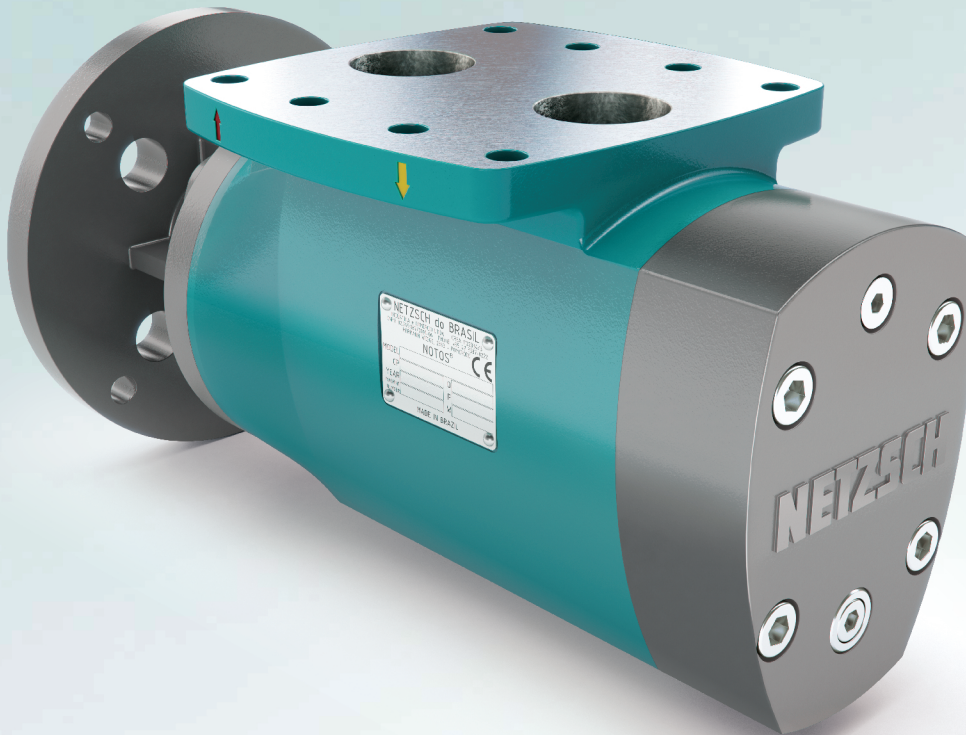

Specially designed for the marine market, the NOTOS® Mini pumps comprise of three different sizes with advanced performance technology and design.

Performance

- Capacity from 10 to 180 lpm
- Maximum pressure 25 bar
- Temperature up to 180°C
- Viscosity from 1,5 to 2000 cSt

Product Features


- Axially balanced
- Mechanical seal under suction pressure
- Integral relief valve, cartridge design
- High efficiency unique design
- External bearings
- SAE or special ports
- Externally adjustable relief valve
- Modern design
- Marine certification

Applications

- Low sulphur diesel
- Diesel
- Fuel oil
- Lube oil
- Heavy fuel oil

NOTOS®

3NS Mini Design


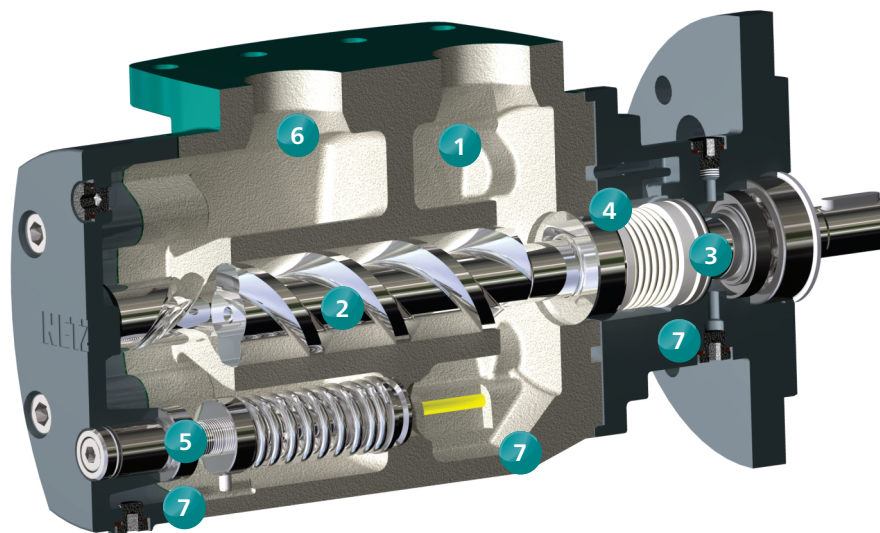


Advantages

- Low noise
- High efficiency
- Low maintenance
- Compact Design
- Long lifetime
- Low life-cycle cost
- Good suction capability

- 1 Housing
- 2 Screws
- 3 Mechanical seal
- 4 Balance piston
- 5 Cartridge relief valve
- 6 Optimised suction
- 7 Drain

Models	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	Y	W	X	Z
3NS MINI-/25M2E	276	73	40	103,8	60	236	16	5	16	130	160	110	9	26,16	52,37	26,16	52,37	25	25	M10	M10	16	29	14	5
3NS MINI-/25M3E	309	73	40	111,8	75	269	13	5	15	130	160	110	9	26,16	52,37	35,72	69,85	40	25	M10	M12	16	29	14	5
3NS MINI-/25M4E	369	85	50	129,8	85	319	15	6	15	145	170	120	11	35,72	69,85	35,72	69,85	40	40	M12	M12	21,5	34	19	6

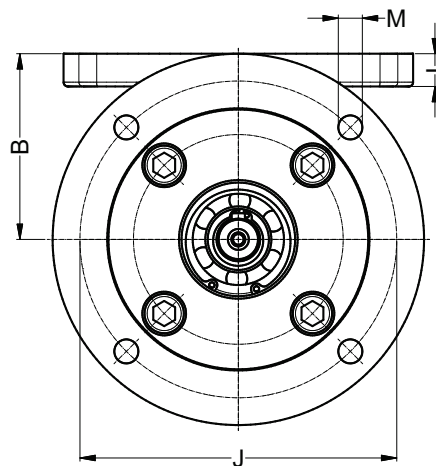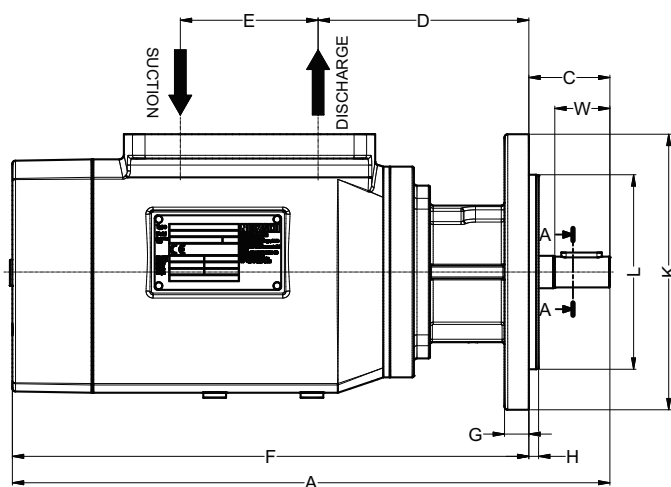

NETZSCH do Brasil Ind. e Com. Ltda.
 Rua Hermann Weege, 2383
 89.107 - 000 - Pomerode / SC
 Fone: +55 (47) 3387 8222
 Fax: +55 (47) 3387 8400
 E-mail: info.ndb@netzsch.com
 www.netzsch.com.br

NETZSCH®
 www.netzsch.com